



Chioccarello

Viale dell' Industria 4, 36036 Torrelvicino (Vicenza) Italy


Tel. / Fax. + 39 0445 661651 +39 0445 1654761

www.chioccarello.it - info@chioccarello.it

P.I. e C.F. 03845630247

Garda outdoor


MADE in ITALY

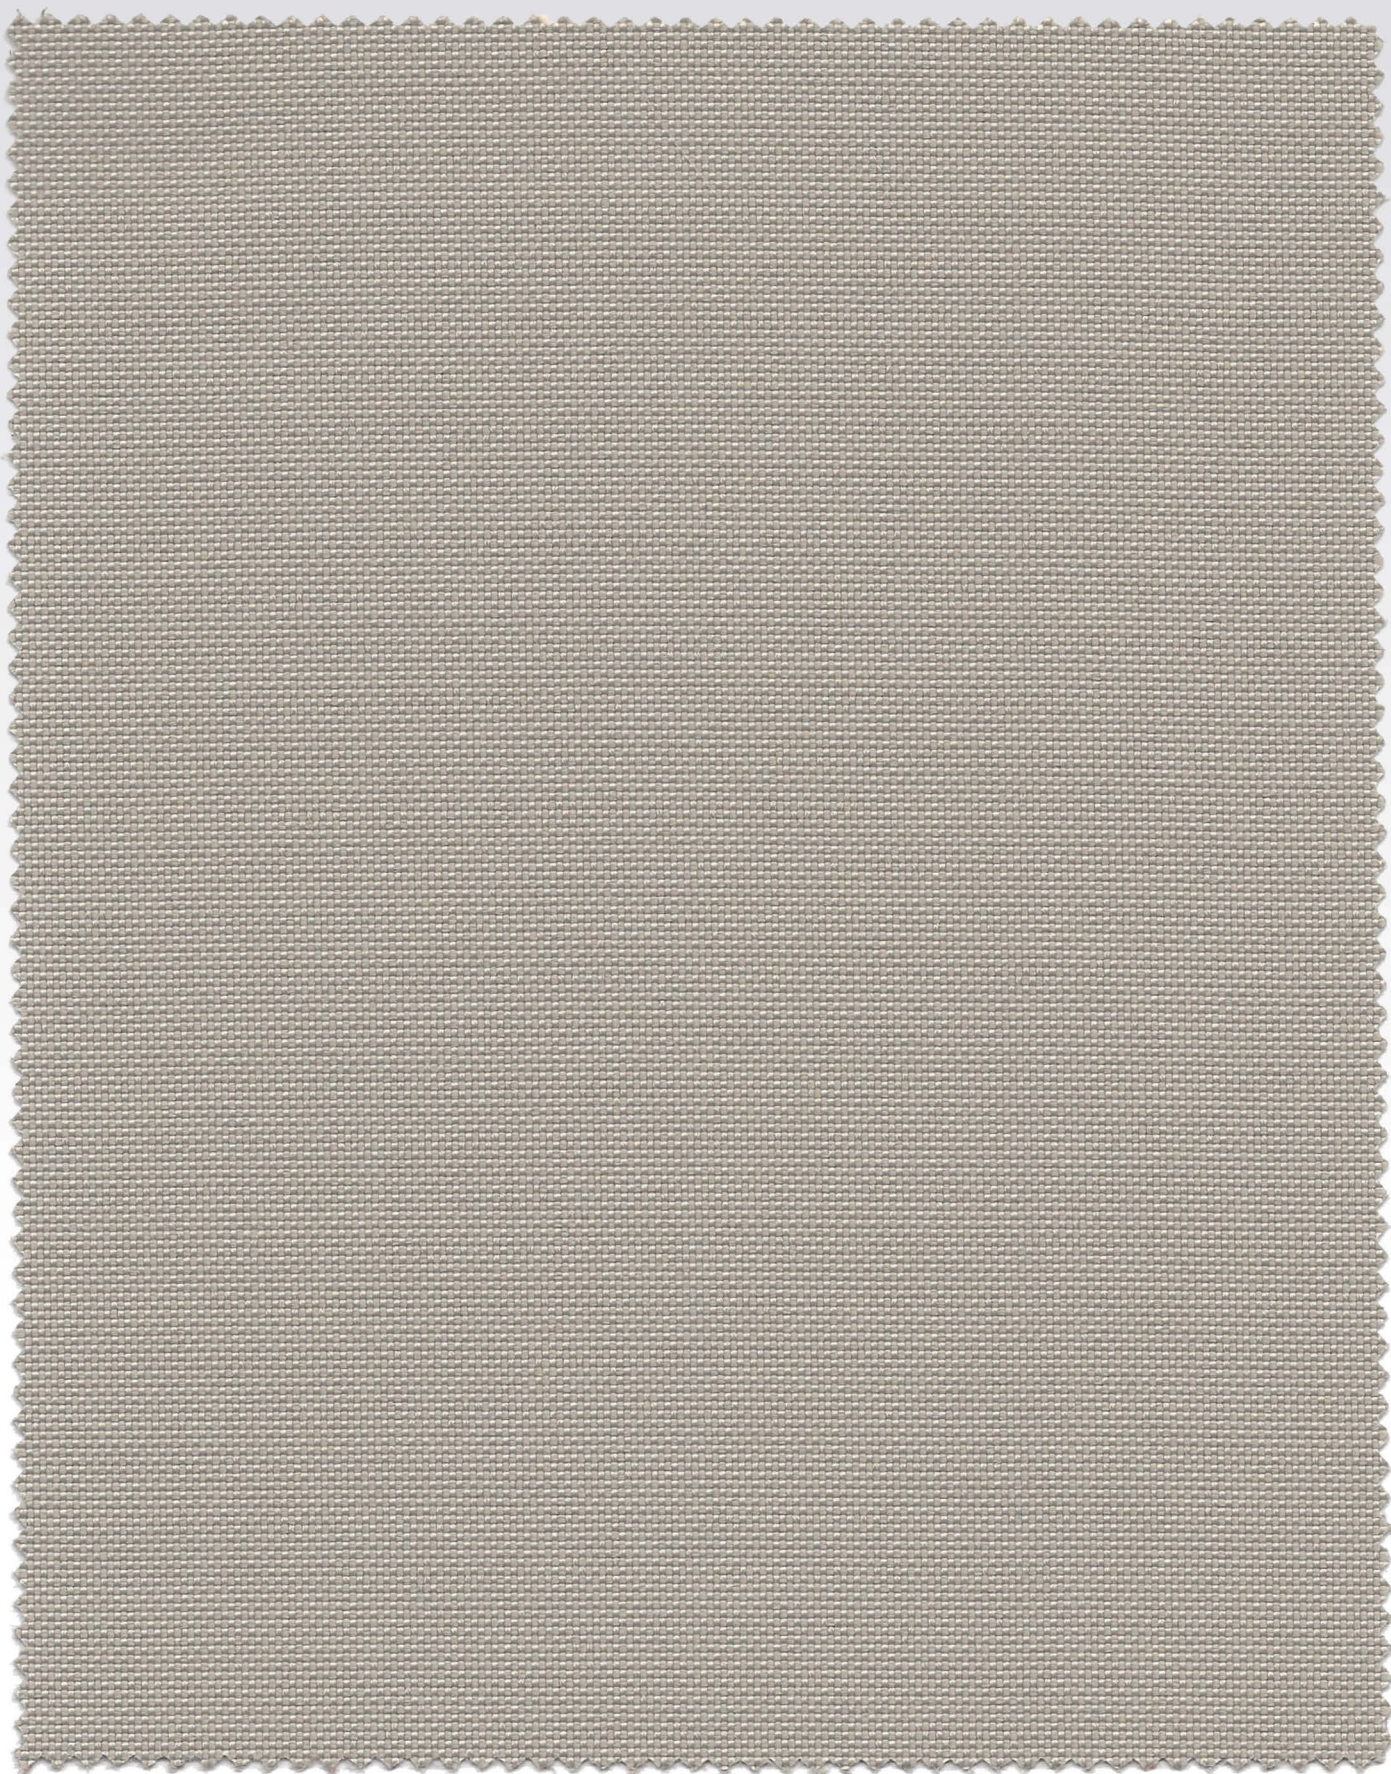


MADE in ITALY




GOUT/1022




GOUT/1007



GOUT/1015




GOUT/1021




GOUT/1012




GOUT/1023




GOUT/1006




GOUT/1019




GOUT/1009



GOUT/1002




GOUT/1005




GOUT/1004


MADE in ITALY




GOUT/1018




GOUT/1014




GOUT/1017




GOUT/1011




GOUT/1001




GOUT/1020



GOUT/1003




GOUT/1016



GOUT/1013



GOUT/1008



GOUT/1010

MADE in ITALY

I	UK	D	F	E
Composizione 100% Poliestere alta tenacità	Composition 100% High tenacity Polyester	Zusammensetzung 100% Hochfestem Polyester	Materiale 100% Polyester à haute ténacité	Composición 100% Poliéster de alta tenacidad
Peso 400 g/m ² ± 15	Weight 400 g/m ² ± 15	Gewicht 400 g/m ² ± 15	Poids 400 g/m ² ± 15	Peso 400 g/m ² ± 15
Altezza 140 cm ± 2	Width 140 cm ± 2	Breite 140 cm ± 2	Langeur 140 cm ± 2	Ancho 140 cm ± 2
Lunghezza rotolo 25 mt ±5%	Roll lenght 25 mt ±5%	Rolle länge 25 mt ±5%	Longueur rotulea 25 mt ±5%	Longitud rollo 25 mt ±5%
Resistenza all'abrasione >100000 cicli Martindale	Abrasion Resistance >100000 Martindale cycles	Scheuerfestigkeit >100000 Martindale Scheuertouren	Résistance à l'abrasion >100000 Martindale tours	Resistencia a la abrasión >100000 Martindale ciclos
Resistenza alla luce (EN ISO 105-B02) 6	Light Fastness (EN ISO 105-B02) 6	Lichtechtheit (EN ISO 105-B02) 6	Solidité à la lumière (EN ISO 105-B02) 6	Solidez a la luz (EN ISO 105-B02) 6
Resistenza allo sfregamento (EN ISO 105-X12) Umido: 4/5 Secco: 5	Fastness to Rubbing (EN ISO 105-X12) Wet: 4/5 Dry: 5	Reibechtheit (EN ISO 105-X12) Nass: 4/5 Trocken: 5	Solidité au frottement (EN ISO 105-X12) Mouillé: 4/5 Sec: 5	Solidez al rozamiento (EN ISO 105-X12) Húmedo: 4/5 Seco: 5
Infiammabilità 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 IMO	Flammability 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 IMO	Feuersicherung 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 IMO	Flammabilité 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 IMO	Inflamabilidad 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 IMO
Idrorepellente, antimacchia e antimuffa	Water repellent, anti-stain and anti-mould treatment	Hydrophobe, flecken- und schimmelresistent	Hydrofuge, résistant aux taches et à la moisissure	Repelencia al agua, resistente a las manchas y al moho
Colore Leggere differenze di colore fra una partita e l'altra sono da considerarsi normali	Colour Slight color differences between one lot and another have to be considered within commercial tolerance	Farbabweichungen Leichte farbunterschiede sind zwischen zwei Partien als normal su betrachten	Coloris Légères différences de couleur entre un lot et l'autre doivent être considérés comme étant normales	Color Ligeras diferencias de color entre un lote y el otro son normales



Stock Service



Cut Service



MADE in ITALY