



TEXTURE

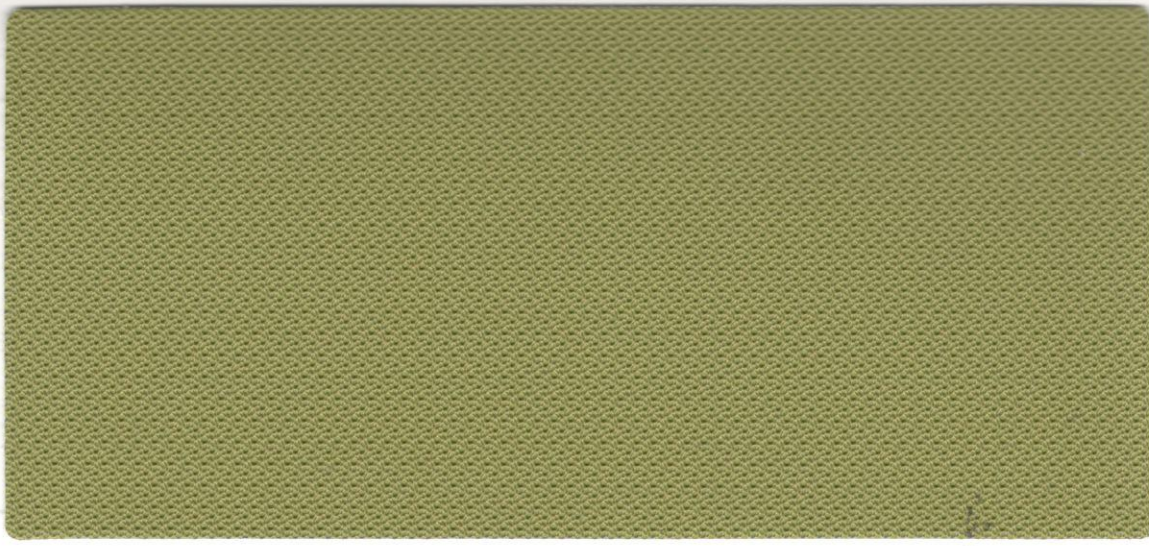

42325

42161




42162

42163

42164

42165

42166




42167

42168

42169

42326

42171



HIGH UV RESISTANT
YÜKSEK UV DİRENCİ



FIRE RESISTANT
ALEV GECİKTİRİCİ



CHLORIN, MOLD AND
DISINFECTANT RESISTANT
KLOR, KÜF VE DEZENFEKTAN
DİRENCİ



EASY TO CLEAN




WATER PROOF




BACTERIAL RESISTANT

Artificial Leather & Textile Inc.
Technical Qualifications


 Weight	650 gr/m ² (+-) 40	
 Width	140 cm (+-) 3	
 Roll Length	30 mt	
Tensile Strength EN ISO 1421	Width Wise 48,8 Kg/cm	Lenght Wise 39,2 Kg/cm
Tensile Elongation EN ISO 1421	Width Wise % 20	Lenght Wise % 15
Tear Resistance EN ISO 4674-2	Width Wise 1,05 Kg	Lenght Wise 1,40 Kg
Martindale Abrasion Flex Resistance (-10C) TS 6720	>100000 Width Wise >100000 Nflex	>100000 Lenght Wise >100000 Nflex
Rubbing /Dry-Wet Abrasion Resistance DIN 53 863	>300000 RUBS	

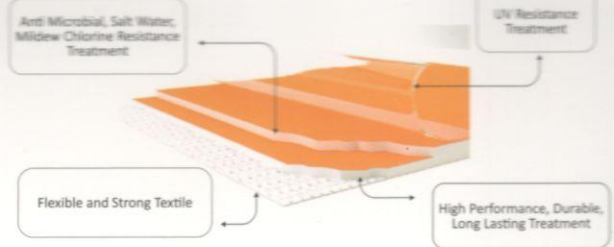


SURFACE - COMPOSITION

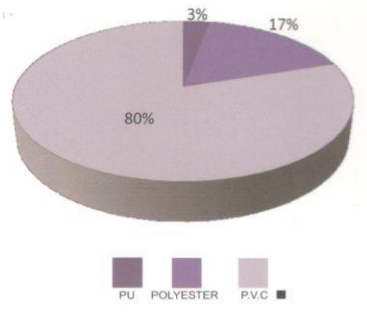

 **OEKOTEX** STANDARD 100, PRODUCT CLASS IV

 **FR STANDARDS** BS 5852 PART 0 & 1, IMO 2010 FTP P 8, USA NFPA260 -1

 **Resistance to salt water, chlorine** ISO 105 E03 4-5

 **Light Fastness** ISO 105-BO4 7+ (754 HOURS)

- MEDICAL**
- CAFE, HOTEL RESTAURANT OFFICE ETC.**
- HOME&GARDEN**
- WELLNESS**
- MARINE**

