



40471




40430



40492



40619



42948



40603



42949



40411




40612



39130



43174



40605



42951




42950




40491



40434



40413



41941



40604



40415



42953



39132



40606



41942




40435




**Artificial Leather & Textile Inc.  
Technical Qualifications**

 <b>Weight</b>	650 gr/m <sup>2</sup> (+-) 40	
 <b>Width</b>	140 cm (+-) 3	
 <b>Roll Length</b>	30 mt	
<b>Tensile Strength EN ISO 1421</b>	Width Wise 48,8 Kg/cm	Lenght Wise 39,2 Kg/cm
<b>Tensile Elongation EN ISO 1421</b>	Width Wise % 20	Lenght Wise % 15
<b>Tear Resistance EN ISO 4674-2</b>	Width Wise 1,05 Kg	Lenght Wise 1,40 Kg
<b>Martindale Abrasion Flex Resistance (-10C) TS 6720</b>	>100000 Width Wise >100000 NFlex	>100000 Lenght Wise >100000 Nflex
<b>Rubbing /Dry-Wet Abrasion Resistance DIN 53 863</b>	>300000 RUBS	

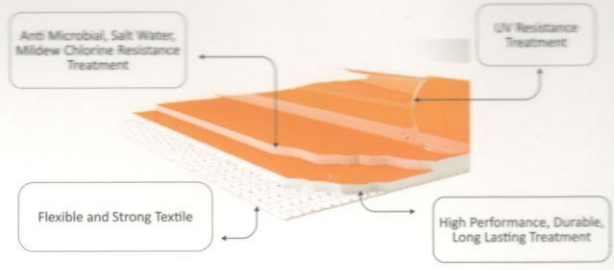

**SURFACE COMPOSITION**

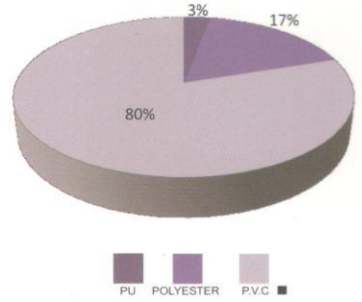

OEKOTEX

STANDARD 100, PRODUCT CLASS IV



FR STANDARDS

BS 5852 PART 0 & 1, IMO 2010 FTP P 8, USA NFPA260 -1



resistant to sea water and chlorine

Resistance to salt water, chlorine  
ISO 105 E03

4-5



Light Fastness  
ISO 105-BO4

7+ ( 754 HOURS )

- MEDICAL
- CAFE, HOTEL RESTAURANT OFFICE ETC.
- HOME&GARDEN
- WELLNESS
- MARINE

